


BLC/Y05/10/15/20/08/16BLF/C1/2 櫥櫃燈/層板燈系列

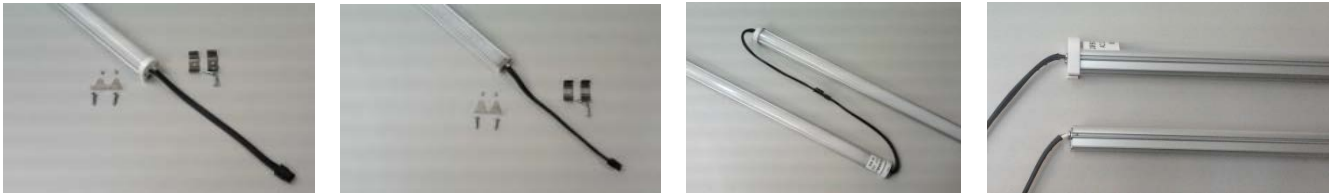

Characteristics : Apply to series connection without power.

Specifications:

Model	BLC/Y05BL		BLC/Y10BL		BLC/Y15BL		BLC/Y20BL		BLC/Y09BL		BLC/Y18BL	
Series connection	120V	20	120V	10	120V	7	120V	5	120V	12	120V	6
allowed quantity	240V	40	240V	20	240V	15	240V	10	240V	24	240V	12
Input	AC 120V/240V											
Power Factor	>0.9											
Power Consumption	5W	10W	15W	20W	8W	16W						
LED Source	From Taiwan											
LED Quantity	60	120	180	240	60	120						
CCT	5650±650K/3000±250K											
CRI	70											
Luminance Flux	480 Lm	960 Lm	1440 Lm	1920 Lm	675 Lm	1350 Lm						
Curve Haze Mask Illuminance@1M	150 Lux	300 Lux	450 Lux	600 Lux	210 Lux	480 Lux						
Beam Angle	140°											
Dimensions(mm)	19*13*310	19*13*610	19*13*910	19*13*1210	19*13*610	19*13*1210						
Flat Haze Mask Illuminance@1M	190 Lux	380 Lux	570 Lux	760 Lux	270 Lux	540 Lux						
Beam Angle	120°											
Dimensions(mm)	15*13*310	15*13*610	15*13*910	15*13*1210	15*13*610	15*13*1210						
Material	Aluminum, PC(fireproof material)											
Operating Temp.	-30~40°C											
Lighting Temp.	65°						50°					
Weight	83g	150g	218g	288g	147g	282g						

Accessories:



Clip×2pcs(Standerd option);



Stand×2pcs(Standerd option);



Magnet×2pcs(Choose to buy);



Dimming controller(Choose to buy)