


## HLCNY05/10/12AY90/45 天井燈系列

### APPLICATIONS

- △ Factory
- △ Warehouse
- △ Gymnasium
- △ Exhibition Hall
- △ Hyper Market
- △ Department Store
- △ Large Outlet
- △ Shopping Mall
- △ CE Certification



### Dimensions

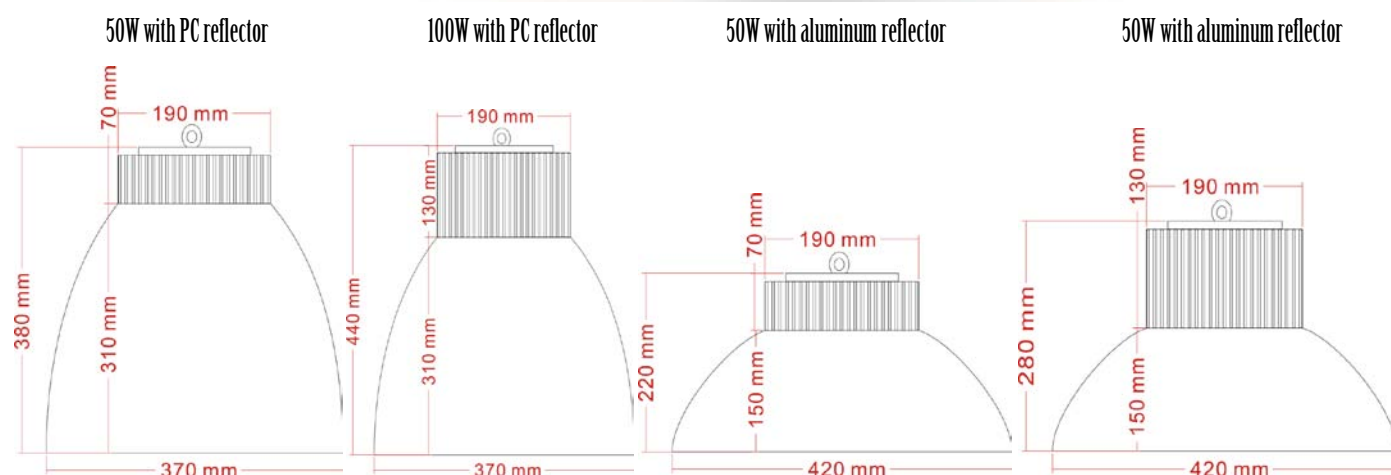

### Specifications

Model	HLC50AY		HLN50AY		HLY50AY		HLC10AY		HLN10AY		HLY10AY		HLC12AY	
Input	AC100~277V, 50~60Hz													
Power Consumption	50W						100W						120W	
CCT	5500K		4300K		3000K		5500K		4000K		3000K		5500K	
CRI	70		75		80		70		75		80		75	
Reflector Material	Aluminum	PC	Aluminum	PC	Aluminum	PC	Aluminum	PC	Aluminum	PC	Aluminum	PC	Aluminum	PC
Weight(KG)	2.5±0.2	3.0±0.2	2.5±0.2	3.0±0.2	2.5±0.2	3.0±0.2	4.5±0.2	5.0±0.2	4.5±0.2	5.0±0.2	4.5±0.2	5.0±0.2	4.7±0.2	5.2±0.2
Beam Angle	90°	45°	90°	45°	90°	45°	90°	45°	90°	45°	90°	45°	90°	45°
Luminous Flux(Lm)	3700		2900		2500		7500		5600		5100		9000	
Lux@4M	220	-	168	-	135	-	330	-	264	-	220	-	400	-
Lux@6M	100	-	72	-	58	-	160	-	114	-	96	-	192	-
Lux@8M	50	-	42	-	35	-	100	-	70	-	50	-	120	-
Lux@10M	30	-	20	-	18	-	74	-	51	-	31	-	90	-
Lux@12M	20	-	13	-	12	-	46	-	37	-	22	-	55	-
Operating Temp	-30°C~45°C													